

# ENGINE DRIVEN

SITE DRAINAGE CENTRIFUGAL - PETROL

## WX WB

The **WX10** is a self priming centrifugal pump, powered by a remarkably compact and powerful 4 stroke, genuine Honda, petrol engine. This is coupled to a pump end that has an aluminium body, volute and impeller, which ensure that it is light, truly portable and easy to store, particularly in vans. It is fitted to a sturdy base plate, with rubber feet to minimize vibration and has a comfortable, yet robust, carrying handle. For reliability, the pump is fitted with a carbon ceramic mechanical seal. It has high head capabilities and gives a good flow of water. It's neat size and performance makes it popular for irrigation, flooded man hole/inspection pit drainage, washing down and general pumping. It is not fitted with an engine oil alert system.

The **WB** pumps are also self priming pumps and are powered by genuine Honda 4 stroke OHV petrol engines. They have carbon ceramic mechanical seals and lightweight, aluminium pump housings, to assist portability. For increased abrasion resistance, they have cast iron volutes and impellers. These materials ensure maximum durability for the pumping of clear and black water as found on building sites. Both models are housed within a protective tubular steel, easy carry frame which has anti-vibration mounts fitted. WB's are fitted with oil alerts, to protect the engines from misuse. These highly popular pumps are used by Utilities and are found regularly on hire fleets.

*Hose couplings, washers, clips and strainers are supplied with all pumps, but hoses are extra. Maximum suction lift is 8 metres, when primed, however 6 metres, or less, is recommended. These pumps must not be allowed to run dry.*

- ✓ Hire fleets
- ✓ Utilities
- ✓ Fire departments
- ✓ Irrigation
- ✓ Wash down
- 25mm (1") – 80mm (3") inlet
- self priming
- petrol driven
- Honda engine

**HONDA**  
POWER EQUIPMENT





**WB20**



**WX10**

### ACCESSORIES

- Hoses page 91
- Cam couplings page 95
- Footvalve & strainer page 103

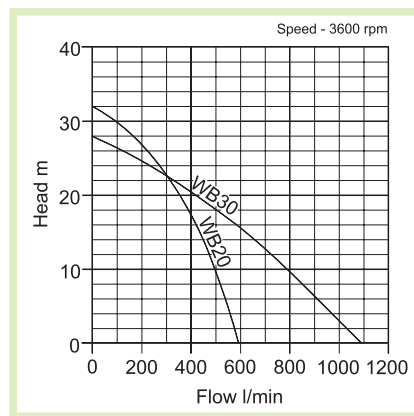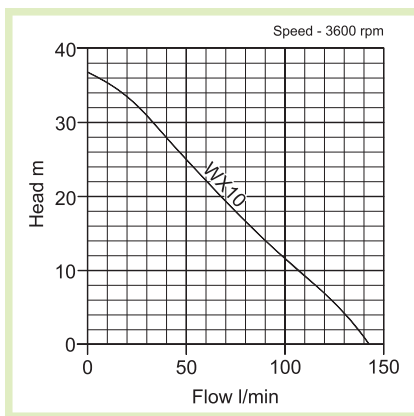

model	inlet (mm)	outlet (mm)	engine	fuel	HP	oil alert	flow (l/min)	head (mtrs)	w x l x h (mm)	free passage (mm)	weight (kgs)
WX10	25	25	GX25	petrol	1.5	no	142	36	220x325x300	5	6
WB20	50	50	GX120	petrol	4.0	yes	590	32	365x455x420	6	21
WB30	80	80	GX160	petrol	5.5	yes	1090	28	385x510x455	6	26